Check of DM corrections of NAARC floats (DAC: BODC) (Argo Snapshot: 06/2019)

C.Cabanes, V. Thierry

SO ARGO - LOPS report - Update October 7, 2019

As part of North Atlantic ARC activities, the floats processed in delayed mode in the NAARC region have been checked again. Here we present the results for the floats of the BODC data center

Contents

1	Method										
2	Results										
	2.1	Summ	ary and suggestions								
	2.2	Float	6900198								
		2.2.1	Current Flags in the netcdf files								
		2.2.2	Sections along the float trajectory - raw data								
		2.2.3	Theta/S diagrams - raw data								
		2.2.4	Comparison to reference Argo profiles								
		2.2.5	Results of the OW method								

1 Method

In the snapshot of May 2019, 2531 floats have been processed in DM in the NAARC region (North of 20°S). Among them, we found 418 floats for which the Pi applied a salinity correction and 2084 floats for which no salinity correction was necessary (i.e. the adjusted salinity profile is equal to the raw salinity profile). For each 2531 floats, we run a modified OW method using four sets of configuration parameters given in table 1, namely configurations 129, 1291, 1292, 1293. Compared to the OW original method (Owens and Wong, 2009), our modified method better take into account the interannual variability and provide more realistic error bars (see Cabanes et al., 2016). Particularly, a Gaussian decay was added to compute the covariance matrix that is used to estimate the large scale field at the float profile position, allowing to give more weight to contemporary reference data.

We further checked the DM salinity correction of a float only if the results get for all of the four configurations differ significantly from the result obtained by the PI of the float. Note that we used an additional run (configuration 124, see table 1) for floats that sample Mediterranean Water masses. We were then able to isolate a small number of floats for which salinity profiles were further checked: sections along the float trajectory, comparison of some profiles with the closest reference data or with the closest real-time argo data available, if needed. Finally, when we thought it was necessary, we suggested to modify the salinity corrections.

OW CONFIGURATION	129	1291	1292	1293	1294	
CONFIG_MAX_CASTS	250	250	250	250	250	
MAP_USE_PV	1	1	1	1	1	
MAP_USE_SAF	0	0	0	0	0	
MAPSCALE_LONGITUDE_LARGE	3.2	1	3.2	3.2	3.2	
MAPSCALE_LONGITUDE_SMALL	0.8	0.5	0.8	0.8	0.8	
MAPSCALE_LATITUDE_LARGE	2	0.5	2	2	2	
MAPSCALE_LATITUDE_SMALL	0.5	0.25	0.5	0.5	0.5	
MAPSCALE_PHI_LARGE	0.1	0.5	0.1	0.1	0.1	
MAPSCALE_PHI_SMALL	0.02	0.1	0.02	0.02	0.02	
MAPSCALE_AGE	0.69	0.69	0.69	0.69	0.69	
MAPSCALE_AGE_LARGE	2	2	10	2	2	
MAP_P_EXCLUDE	0	0	0	0	0	
MAP_P_DELTA	250	250	250	250	250	
Constraint on chosen levels	none	none	none	$> 1000 \mathrm{m}$	$< 1000 \mathrm{m}$	
Reference data base ARGO (2018v01) and CTD (2018v02)						

Table 1: Parameters of the OW method for different configurations used in this study. Compared to the original OW method, the large scale mapping use a Gaussian decay - MAP-SCALE_AGE_LARGE -, the calculation of the mapping error is modified and the horizontal covariance is taken into account for the computation of the error on the fit.

2 Results

2.1 Summary and suggestions

It may be necessary to revise the correction for 1 float listed in table 2.

WMO Number	Launch date	Centre	PI	Last cycle analysed	netcdf files
				(Active/NotActive)	version (prof files)
6900198	04/12/2001	ВО	J.T.	42(NA)	3.1

Table 2: Floats for which it may be necessary to revise the DM correction

Here, we summarize our suggestions for DM salinity correction for each float.

• 6900198: most of the delayed mode data are flaggued at 4. The first 6 cycles are not flaggued at 4 but there is a salinity offset compared to reference data (see Figure 5). We would suggest to flag at 4 the salinity data of the first 6 cycles too given the erratic salinity values throughout the profiles.

2.2 Float 6900198

2.2.1 Current Flags in the netcdf files

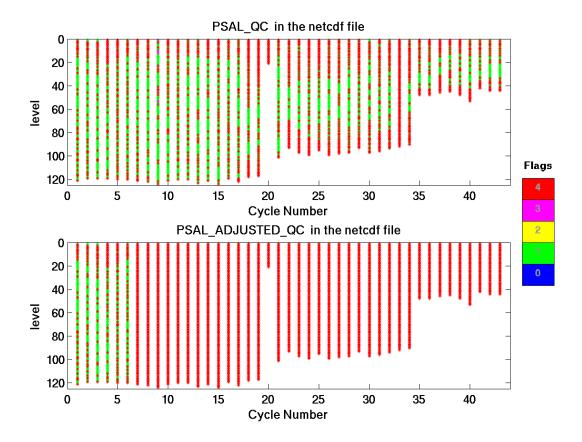


Figure 1: Float 6900198. Flags assigned to PSAL_QC and PSAL_ADJUSTED_QC in the netcdf file available on GDAC

2.2.2 Sections along the float trajectory - raw data

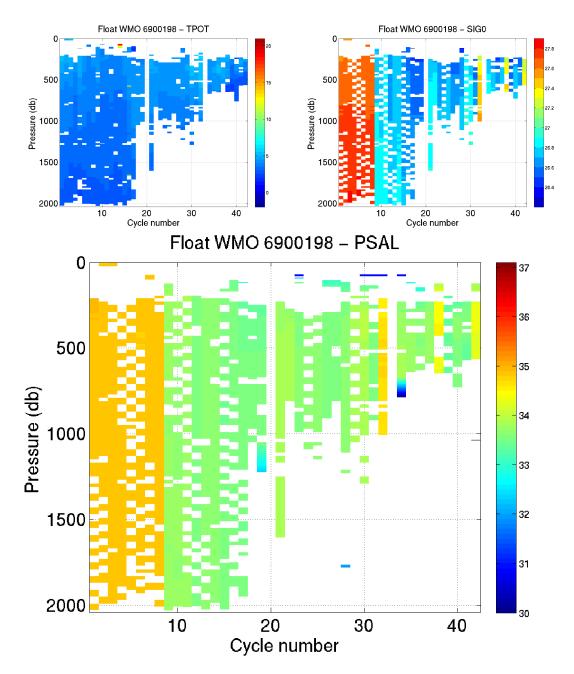


Figure 2: Float 6900198. Potential temperature, Sig0 and salinity sections along the float trajectory (raw data, bad data with quality flags > 2 are not plotted)

2.2.3 Theta/S diagrams - raw data




Figure 3: Float 6900198. The ta/S diagrams of the raw data, with the potential temperature referenced to 0db. Bad data with quality flags > 2 are not plotted.

2.2.4 Comparison to reference Argo profiles

6900198 - Cycle 1 - Date Argo profile 17-Dec-2001 11:12:10(black)
Dates historicals profiles 04-Apr-2006 (blue) and 10-Nov-2005 (magenta)

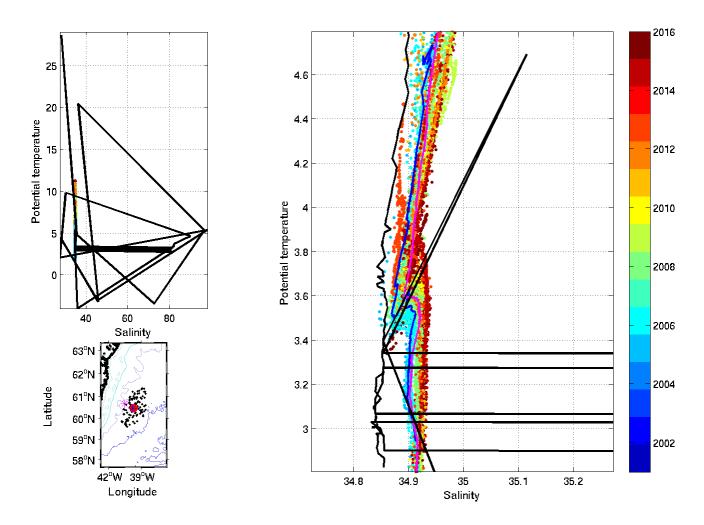
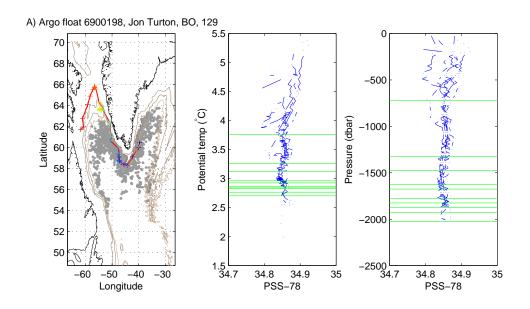


Figure 4: Float 6900198 Cycle 1. The analysed Argo profile (black) is compared to the 50 nearest reference Argo profiles and to two specific profiles: the nearest reference profile in time (magenta) and the nearest reference profile in space (blue). The color of reference profiles represents the year of acquisition. θ/S diagram (left panel) and a zoom on the deepest layers (right panel).

2.2.5 Results of the OW method



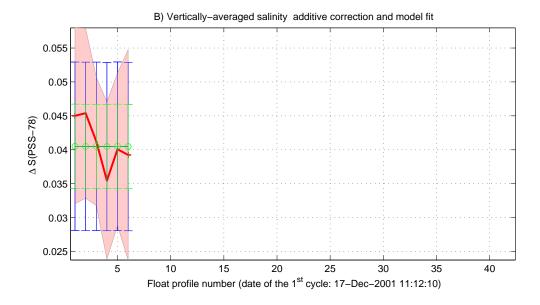


Figure 5: Float 6900198. Results of the OW method (configuration 129). Upper panels: Reference profiles used for the mapping (grey dots) are shown on a map along with the float trajectory. On the two most right-handed figures are displayed in green the ten most stable θ levels used to compute the fit. Lower panel: vertically-averaged mapped salinities minus float salinities on the 10 most stable θ levels (red line) and the offset obtained by a linear fit (green circles). The mapping errors are shaded in red. Green error bars show the fit error and blue error bars show the doubled fit error. The salinity correction currently available on the GDAC is displayed in magenta.