
Check of DM corrections of NAARC floats (DAC: CORIOLIS) (Argo Snapshot: 06/2019, DM OPERATOR: B.Bourles)

C.Cabanes, V. Thierry

SO ARGO - LOPS report - Update October 3, 2019

As part of North Atlantic ARC activities, the floats processed in delayed mode in the NAARC region have been checked again. Here we present the results for some floats of the CORIOLIS data center with DM OPERATOR: B.Bourles

Contents

1	Method	2
2	Results	3
2.1	Summary and suggestions	3
2.2	Float 1900205	4
2.2.1	Current Flags in the netcdf files	4
2.2.2	Sections along the float trajectory - raw data	5
2.2.3	Theta/S diagrams - raw data	6
2.2.4	Comparison to reference Argo profiles	7
2.2.5	Results of the OW method	8
2.3	Float 1900220	9
2.3.1	Current Flags in the netcdf files	9
2.3.2	Sections along the float trajectory - raw data	10
2.3.3	Theta/S diagrams - raw data	11
2.3.4	Comparison to reference Argo profiles	12
2.3.5	Results of the OW method	13

1 Method

In the snapshot of May 2019, 2531 floats have been processed in DM in the NAARC region (North of 20°S). Among them, we found 418 floats for which the PI applied a salinity correction and 2084 floats for which no salinity correction was necessary (i.e. the adjusted salinity profile is equal to the raw salinity profile). For each 2531 floats, we run a modified OW method using four sets of configuration parameters given in table 1, namely configurations 129, 1291, 1292, 1293. Compared to the OW original method (Owens and Wong, 2009), our modified method better take into account the interannual variability and provide more realistic error bars (see Cabanes et al., 2016). Particularly, a Gaussian decay was added to compute the covariance matrix that is used to estimate the large scale field at the float profile position, allowing to give more weight to contemporary reference data.

We further checked the DM salinity correction of a float only if the results get for all of the four configurations differ significantly from the result obtained by the PI of the float. Note that we used an additional run (configuration 124, see table 1) for floats that sample Mediterranean Water masses. We were then able to isolate a small number of floats for which salinity profiles were further checked: sections along the float trajectory, comparison of some profiles with the closest reference data or with the closest real-time argo data available, if needed. Finally, when we thought it was necessary, we suggested to modify the salinity corrections.

OW CONFIGURATION	129	1291	1292	1293	1294
CONFIG.MAX_CASTS	250	250	250	250	250
MAP_USE_PV	1	1	1	1	1
MAP_USE_SAF	0	0	0	0	0
MAPSCALE.LONGITUDE.LARGE	3.2	1	3.2	3.2	3.2
MAPSCALE.LONGITUDE.SMALL	0.8	0.5	0.8	0.8	0.8
MAPSCALE.LATITUDE.LARGE	2	0.5	2	2	2
MAPSCALE.LATITUDE.SMALL	0.5	0.25	0.5	0.5	0.5
MAPSCALE.PH.LARGE	0.1	0.5	0.1	0.1	0.1
MAPSCALE.PH.SMALL	0.02	0.1	0.02	0.02	0.02
MAPSCALE.AGE	0.69	0.69	0.69	0.69	0.69
MAPSCALE.AGE.LARGE	2	2	10	2	2
MAP_P_EXCLUDE	0	0	0	0	0
MAP_P_DELTA	250	250	250	250	250
Constraint on chosen levels	none	none	none	> 1000m	< 1000m
Reference data base	ARGO (2018v01) and CTD (2018v01)				

Table 1: Parameters of the OW method for different configurations used in this study. Compared to the original OW method, the large scale mapping use a Gaussian decay - MAPSCALE.AGE.LARGE -, the calculation of the mapping error is modified and the horizontal covariance is taken into account for the computation of the error on the fit.

2 Results

2.1 Summary and suggestions

It may be necessary to revise the correction for 2 floats listed in table 2.

WMO Number	Launch date	Centre	PI	Last cycle analysed (Active/NotActive)	netcdf files version (prof files)
1900205	05/05/2003	IF	B.Bourles	106(NA)	3.1
1900220	13/05/2003	IF	B.Bourles	93(NA)	3.1

Table 2: Floats for which it may be necessary to revise the DM correction

Here, we summarize our suggestions for DM salinity correction for each float.

- **1900205:** Delayed Mode flags were assigned in an inconsistent way: some PSAL_ADJUSTED profiles with a correction much larger than 0.05 are flagged at 1 while salinity profiles just before and after are flagged at 3. Since the drift is very high, we would suggest to flag at 4 all the salinity profiles of this float.
- **1900220:** Delayed Mode flags were assigned in an inconsistent way: A correction is applied but some PSAL_ADJUSTED profiles are flagged at 1 while profiles just before and after are flagged at 3. Flags should be revised: either apply the correction cycles 1-50 and flag these profiles in a consistent way or flag at 4 all profiles

2.2 Float 1900205

2.2.1 Current Flags in the netcdf files

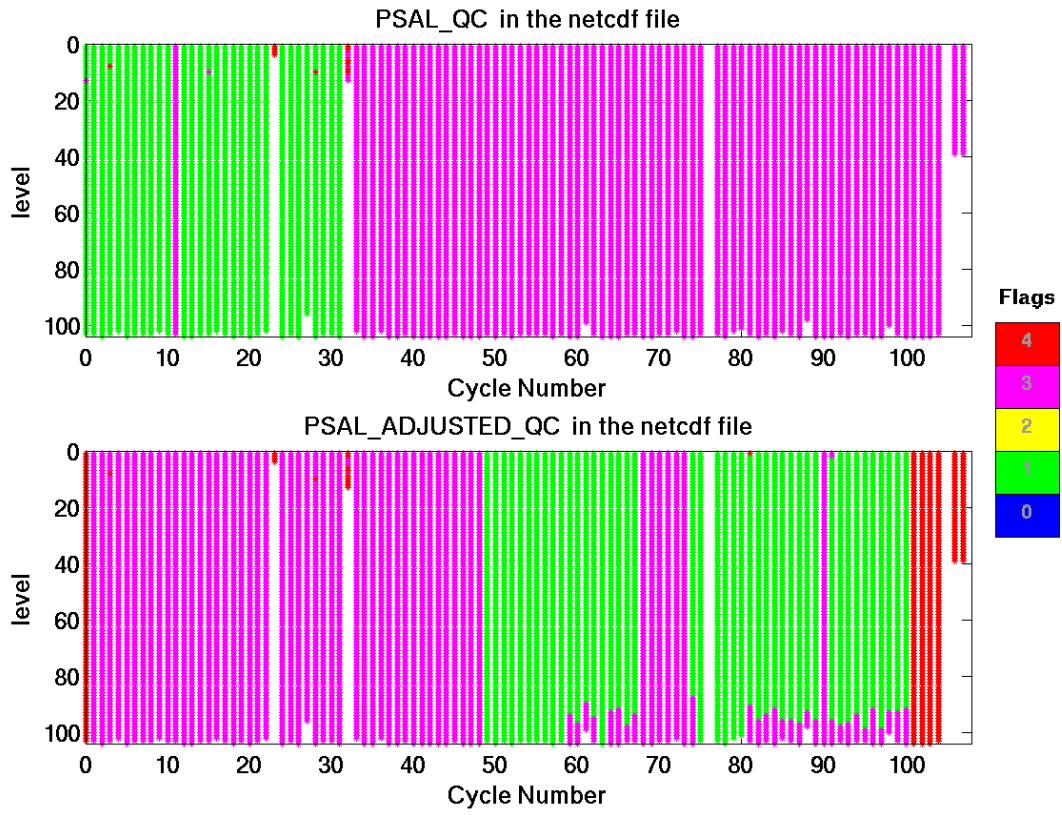


Figure 1: Float 1900205. Flags assigned to PSAL_QC and PSAL_ADJUSTED_QC in the netcdf file available on GDAC

2.2.2 Sections along the float trajectory - raw data

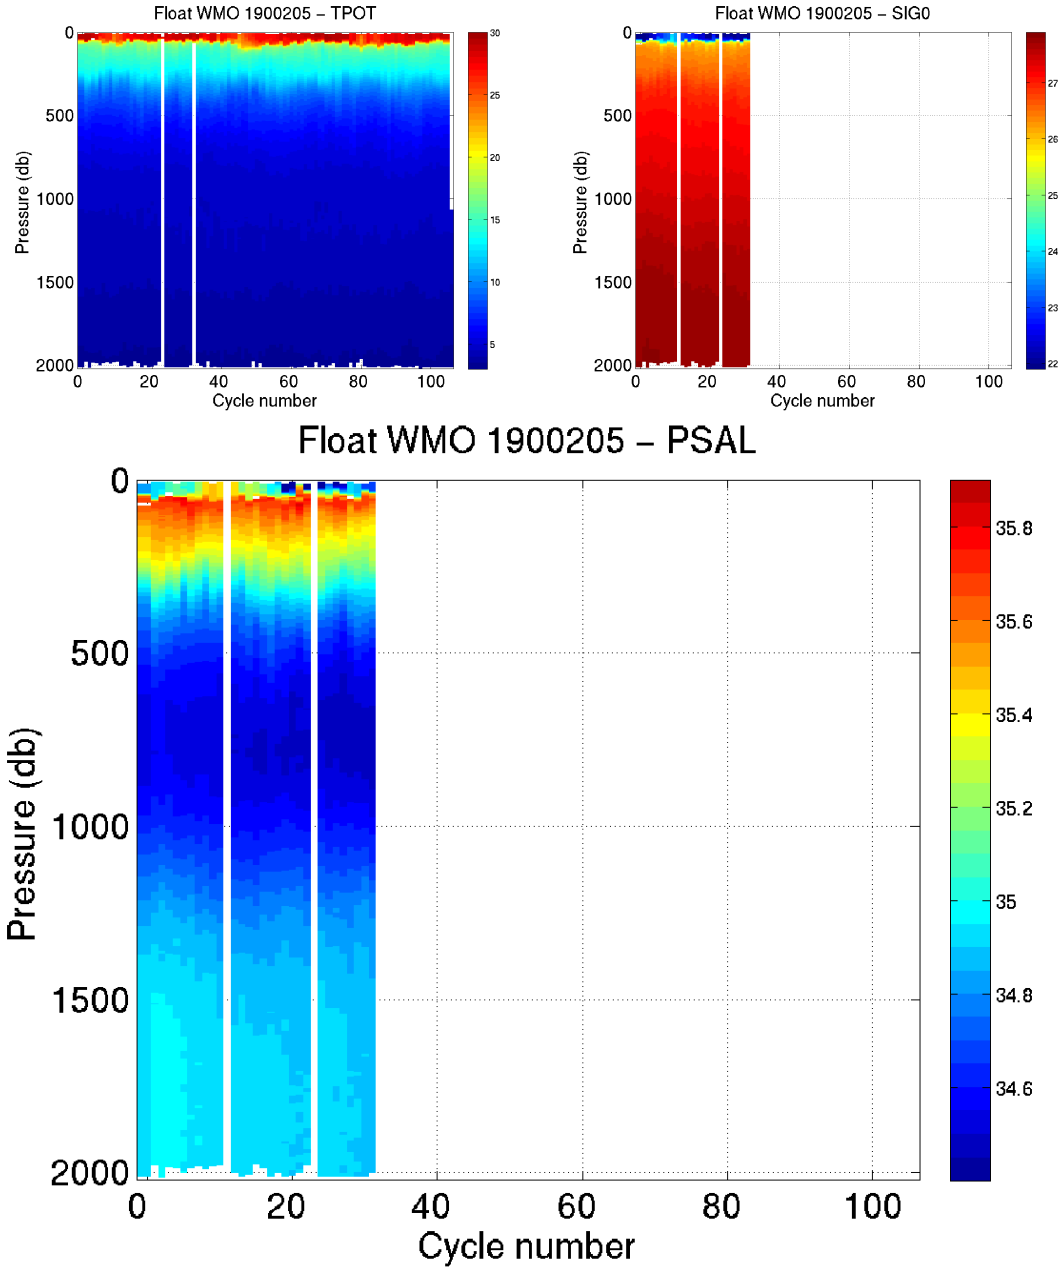


Figure 2: Float 1900205. Potential temperature, Sig0 and salinity sections along the float trajectory (raw data, bad data with quality flags > 2 are not plotted)

2.2.3 Theta/S diagrams - raw data

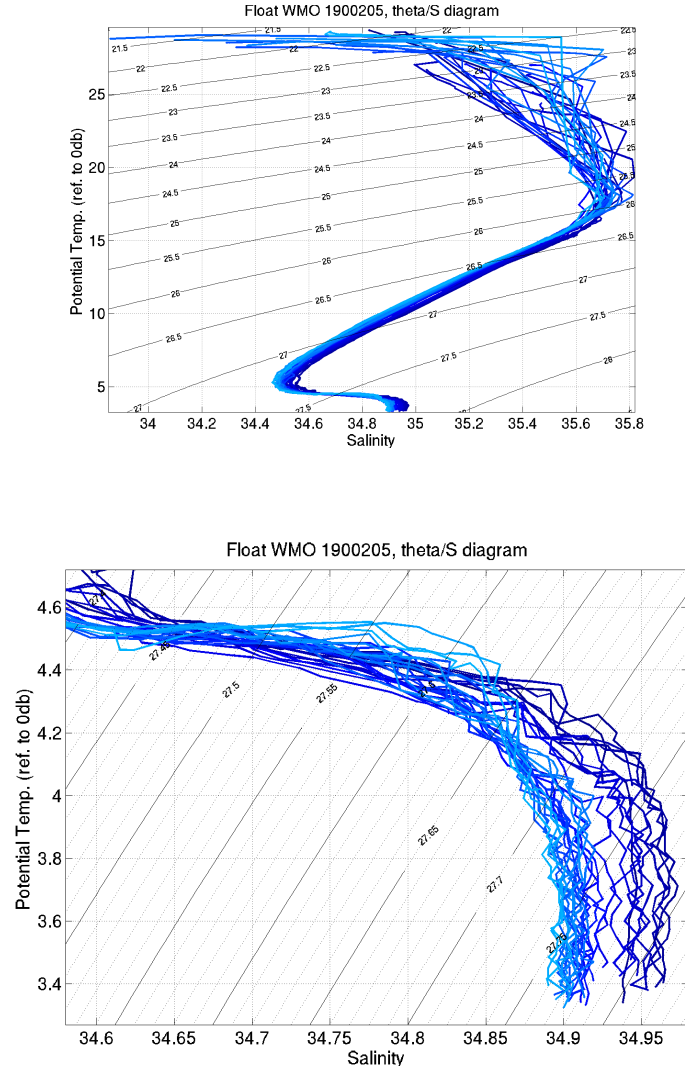


Figure 3: Float 1900205. Theta/S diagrams of the raw data, with the potential temperature referenced to 0db. Bad data with quality flags > 2 are not plotted. Lower panel is a zoom on the deepest layers

2.2.4 Comparison to reference Argo profiles

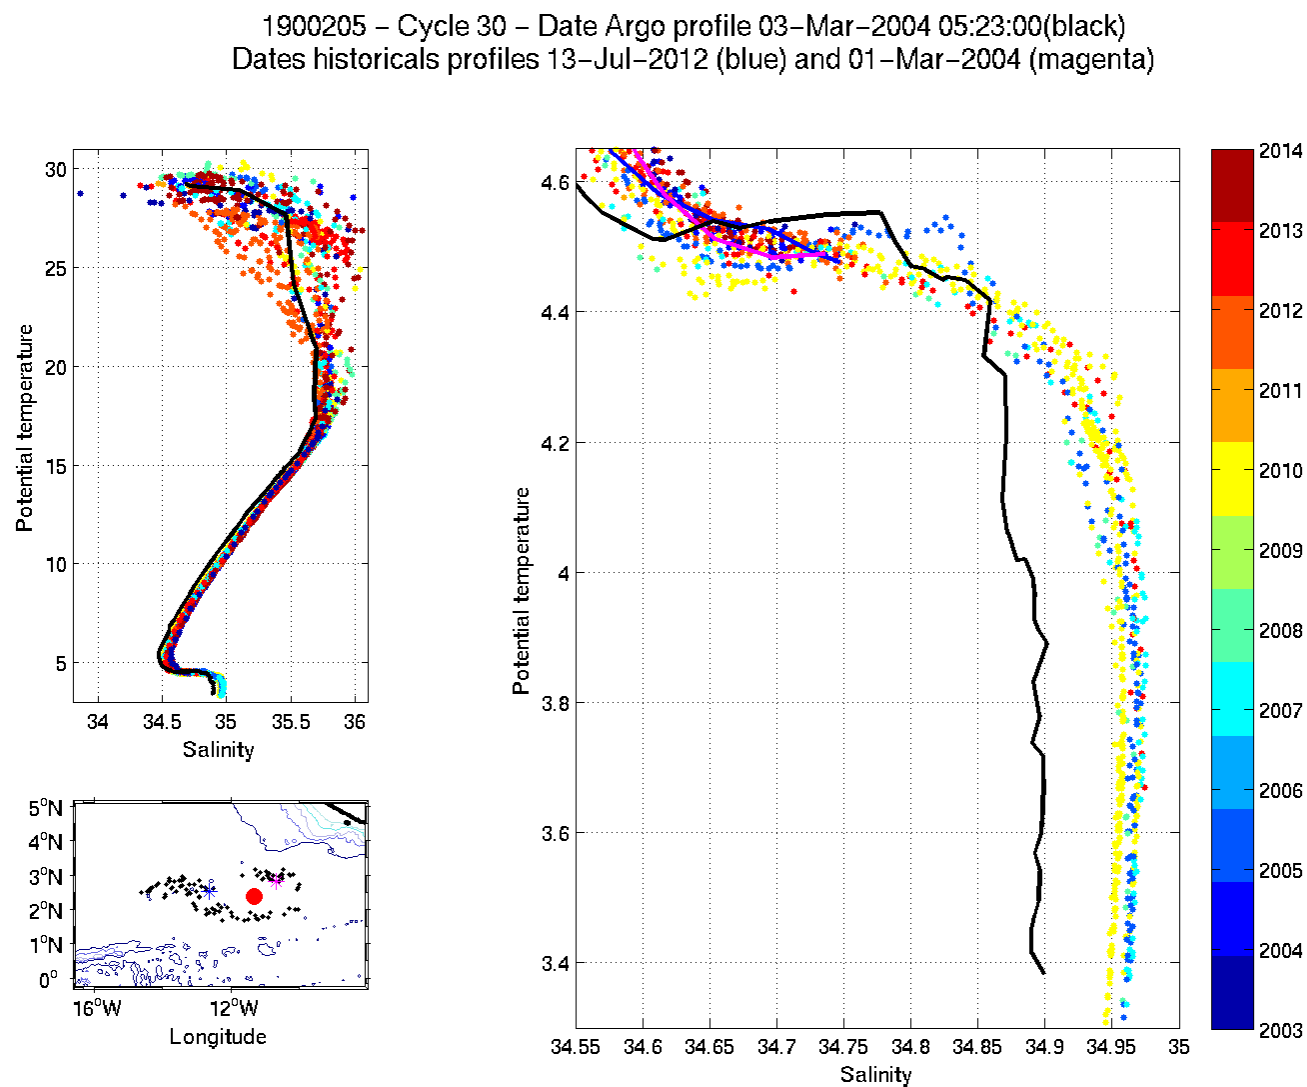


Figure 4: Float 1900205 Cycle 30. The analysed Argo profile (black) is compared to the 50 nearest reference Argo profiles and to two specific profiles: the nearest reference profile in time (magenta) and the nearest reference profile in space (blue). The color of reference profiles represents the year of acquisition. θ/S diagram (left panel) and a zoom on the deepest layers (right panel).

2.2.5 Results of the OW method

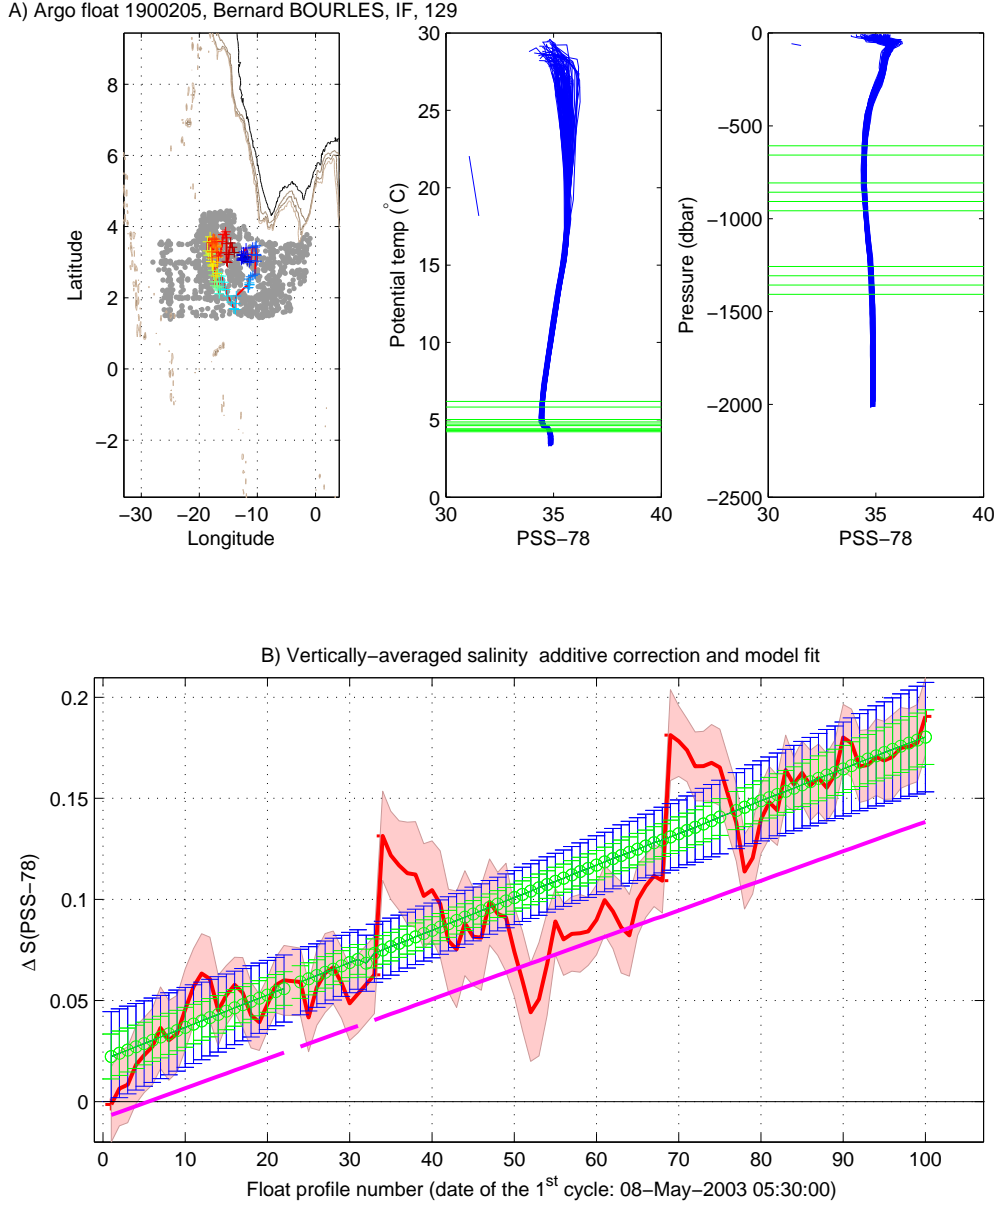


Figure 5: Float 1900205. Results of the OW method (configuration 129). Upper panels: Reference profiles used for the mapping (grey dots) are shown on a map along with the float trajectory. On the two most right-handed figures are displayed in green the ten most stable θ levels used to compute the fit. Lower panel: vertically-averaged mapped salinities minus float salinities on the 10 most stable θ levels (red line) and the offset obtained by a linear fit (green circles). The mapping errors are shaded in red. Green error bars show the fit error and blue error bars show the doubled fit error. The **salinity correction currently available on the GDAC** is displayed in magenta.

2.3 Float 1900220

2.3.1 Current Flags in the netcdf files

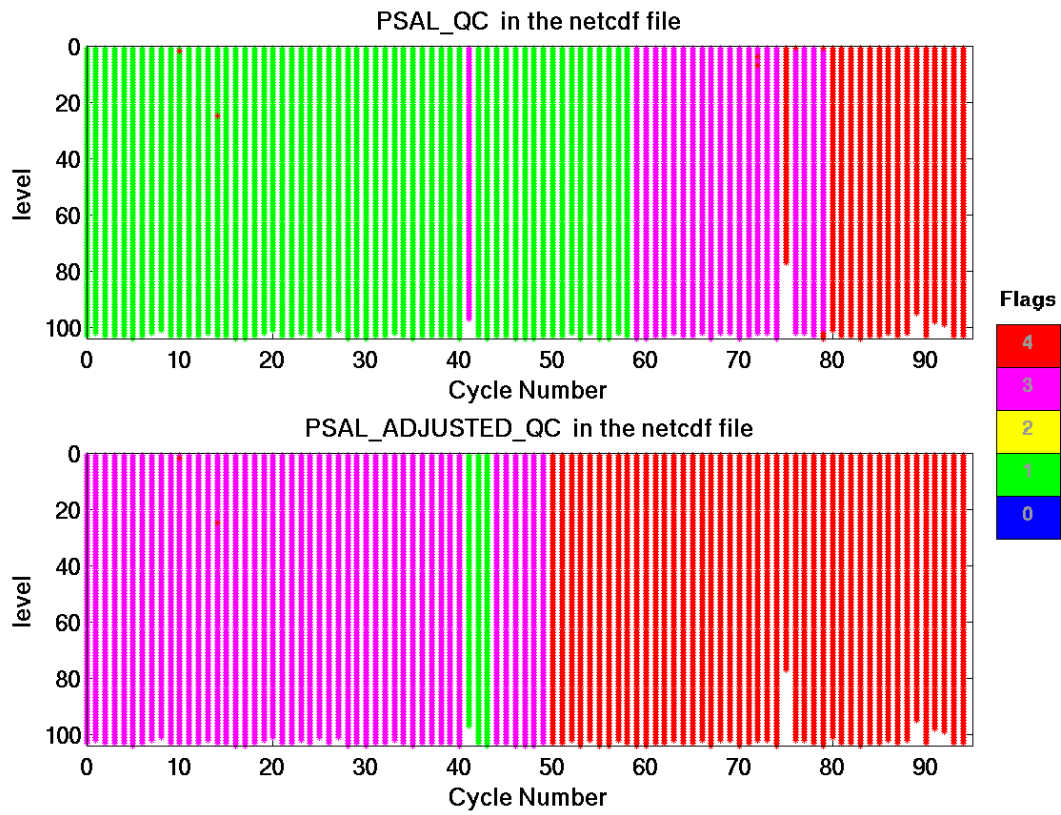


Figure 6: Float 1900220. Flags assigned to PSAL_QC and PSAL_ADJUSTED_QC in the netcdf file available on GDAC

2.3.2 Sections along the float trajectory - raw data

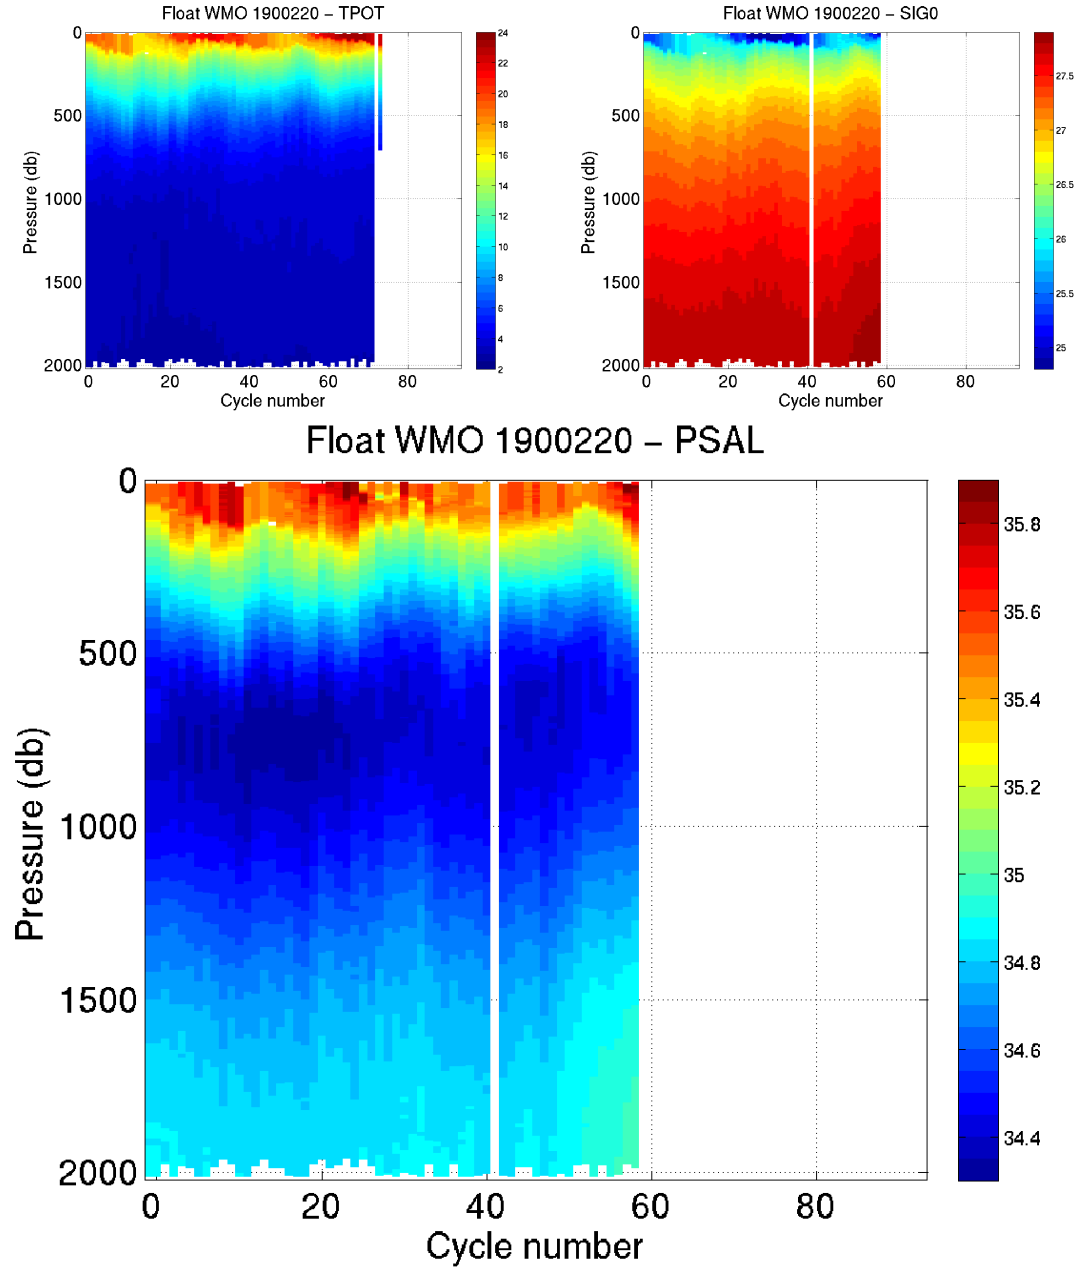


Figure 7: Float 1900220. Potential temperature, Sig0 and salinity sections along the float trajectory (raw data, bad data with quality flags > 2 are not plotted)

2.3.3 Theta/S diagrams - raw data

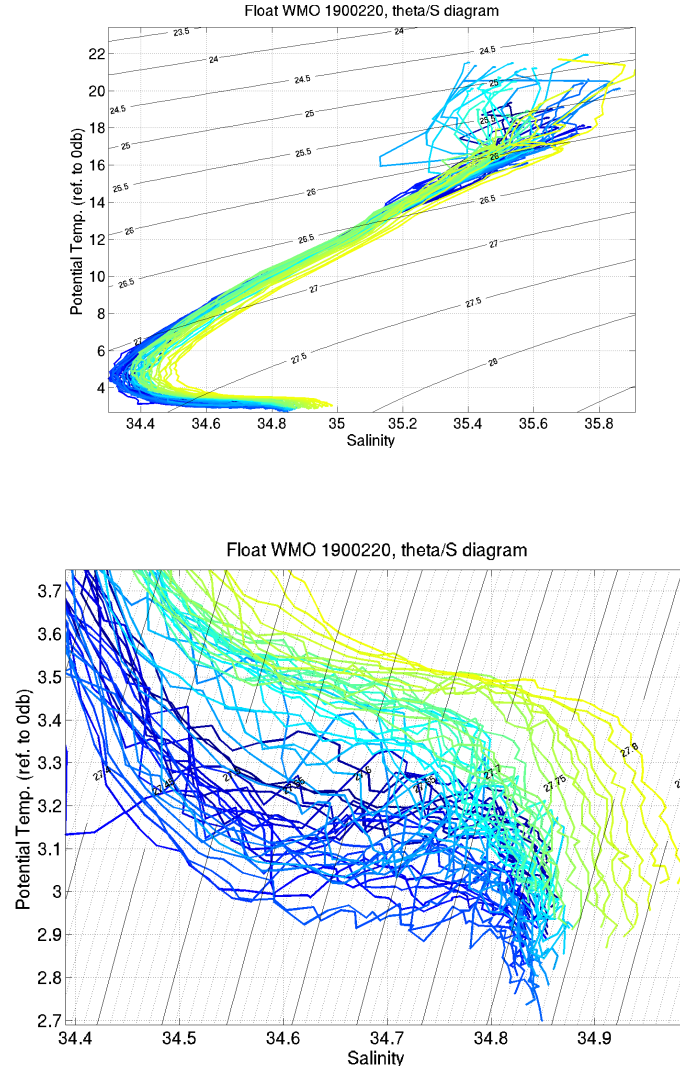


Figure 8: Float 1900220. Theta/S diagrams of the raw data, with the potential temperature referenced to 0db. Bad data with quality flags > 2 are not plotted. Lower panel is a zoom on the deepest layers

2.3.4 Comparison to reference Argo profiles

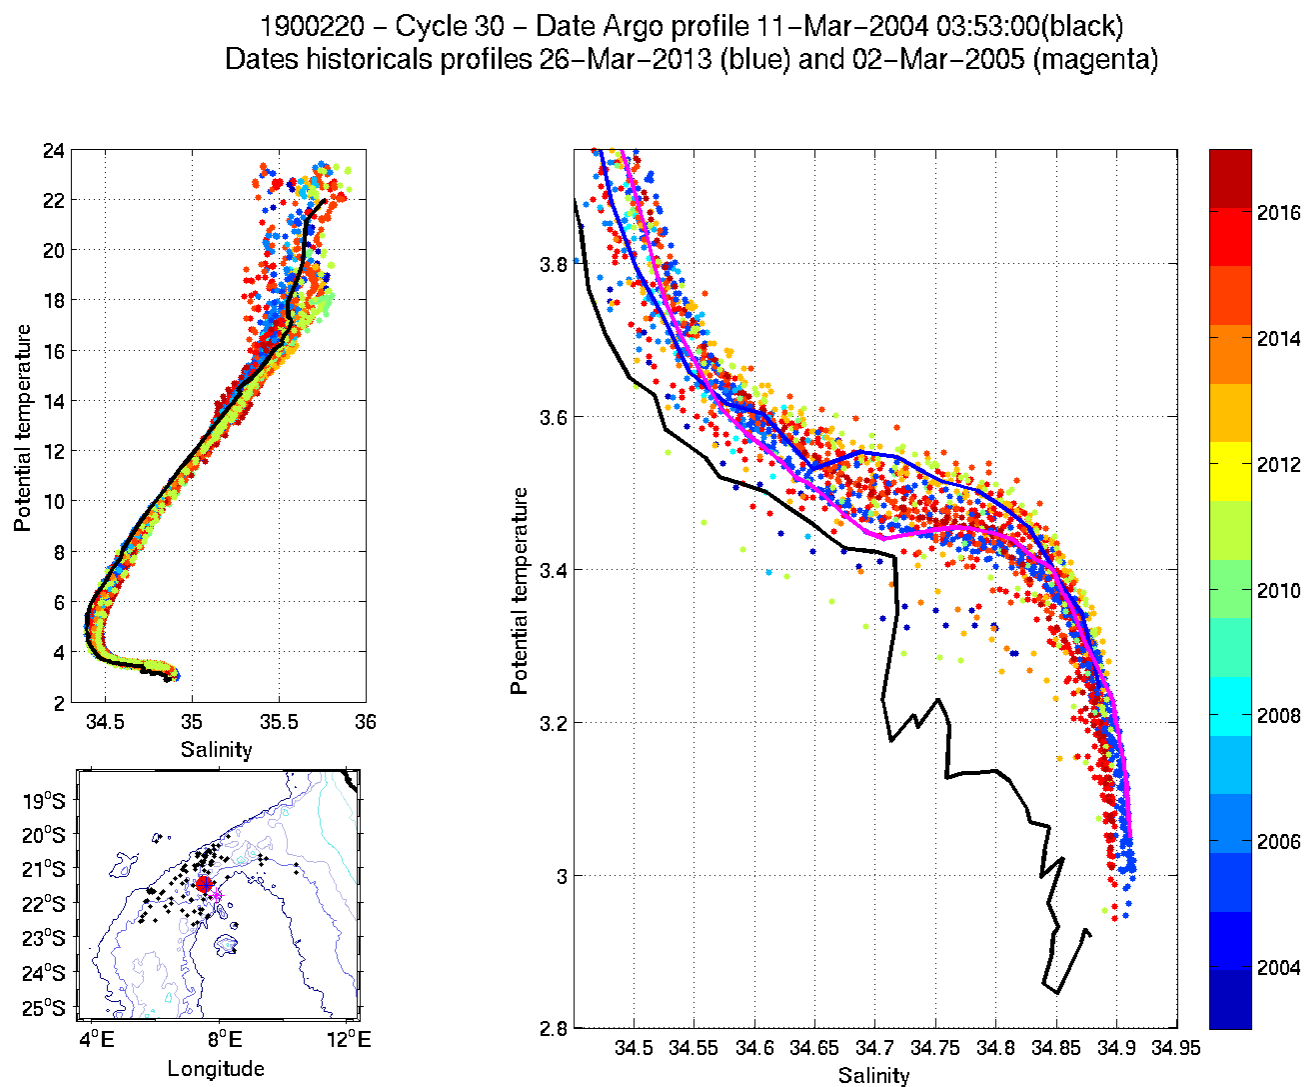


Figure 9: Float 1900220 Cycle 30. The analysed Argo profile (black) is compared to the 50 nearest reference Argo profiles and to two specific profiles: the nearest reference profile in time (magenta) and the nearest reference profile in space (blue). The color of reference profiles represents the year of acquisition. θ/S diagram (left panel) and a zoom on the deepest layers (right panel).

2.3.5 Results of the OW method

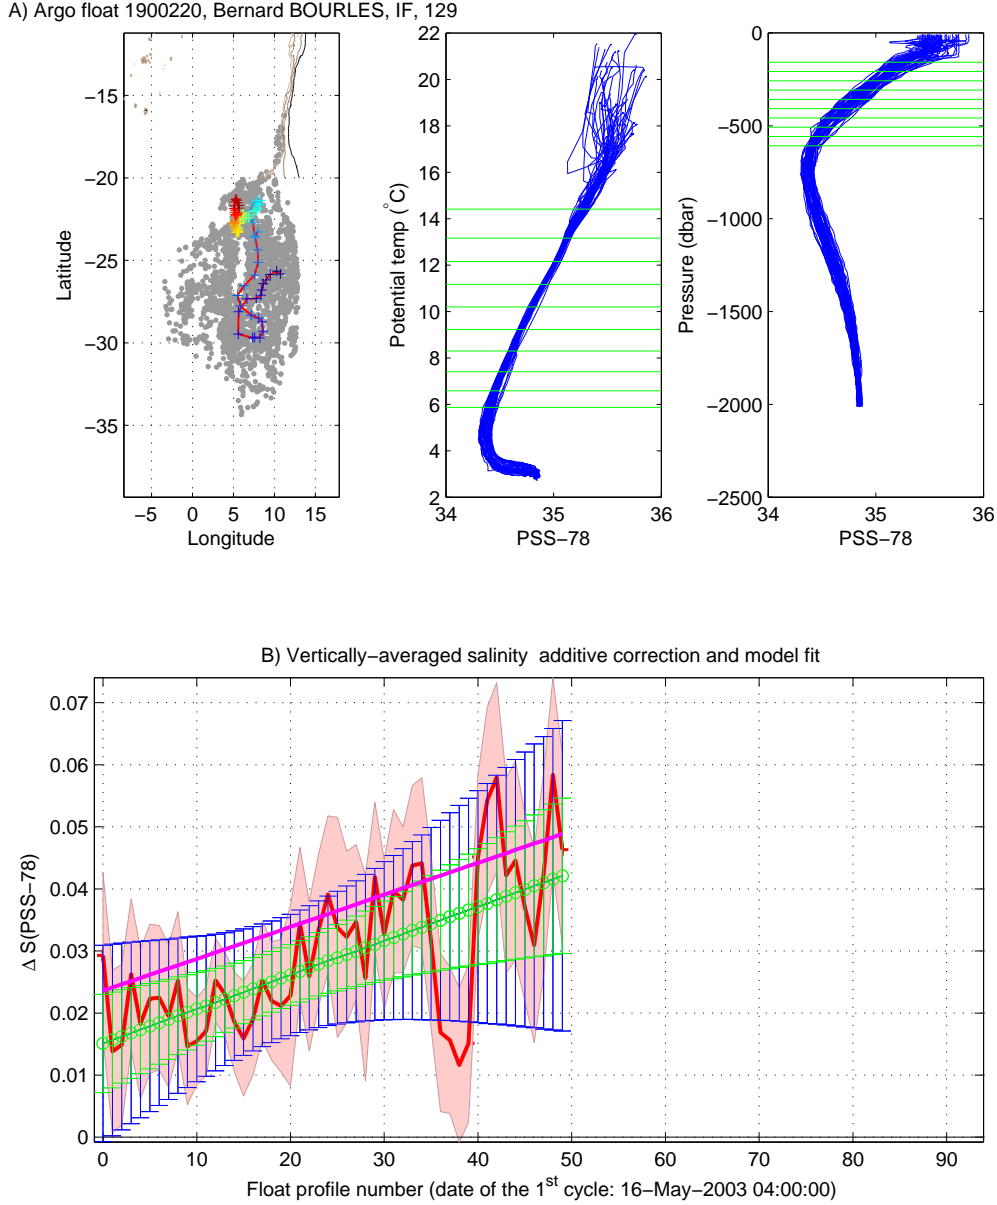


Figure 10: Float 1900220. Results of the OW method (configuration 129). Upper panels: Reference profiles used for the mapping (grey dots) are shown on a map along with the float trajectory. On the two most right-handed figures are displayed in green the ten most stable θ levels used to compute the fit. Lower panel: vertically-averaged mapped salinities minus float salinities on the 10 most stable θ levels (red line) and the offset obtained by a linear fit (green circles). The mapping errors are shaded in red. Green error bars show the fit error and blue error bars show the doubled fit error. The **salinity correction currently available on the GDAC** is displayed in magenta.